




INNOVATIVE
FLOORS



**VERSATILE AND
DURABLE SURFACE SOLUTIONS.**

Our floors are designed to withstand stain and scratches while also being fire retardant, easy to clean and 100% waterproof. Additionally they are environment friendly as they can be easily recycled.



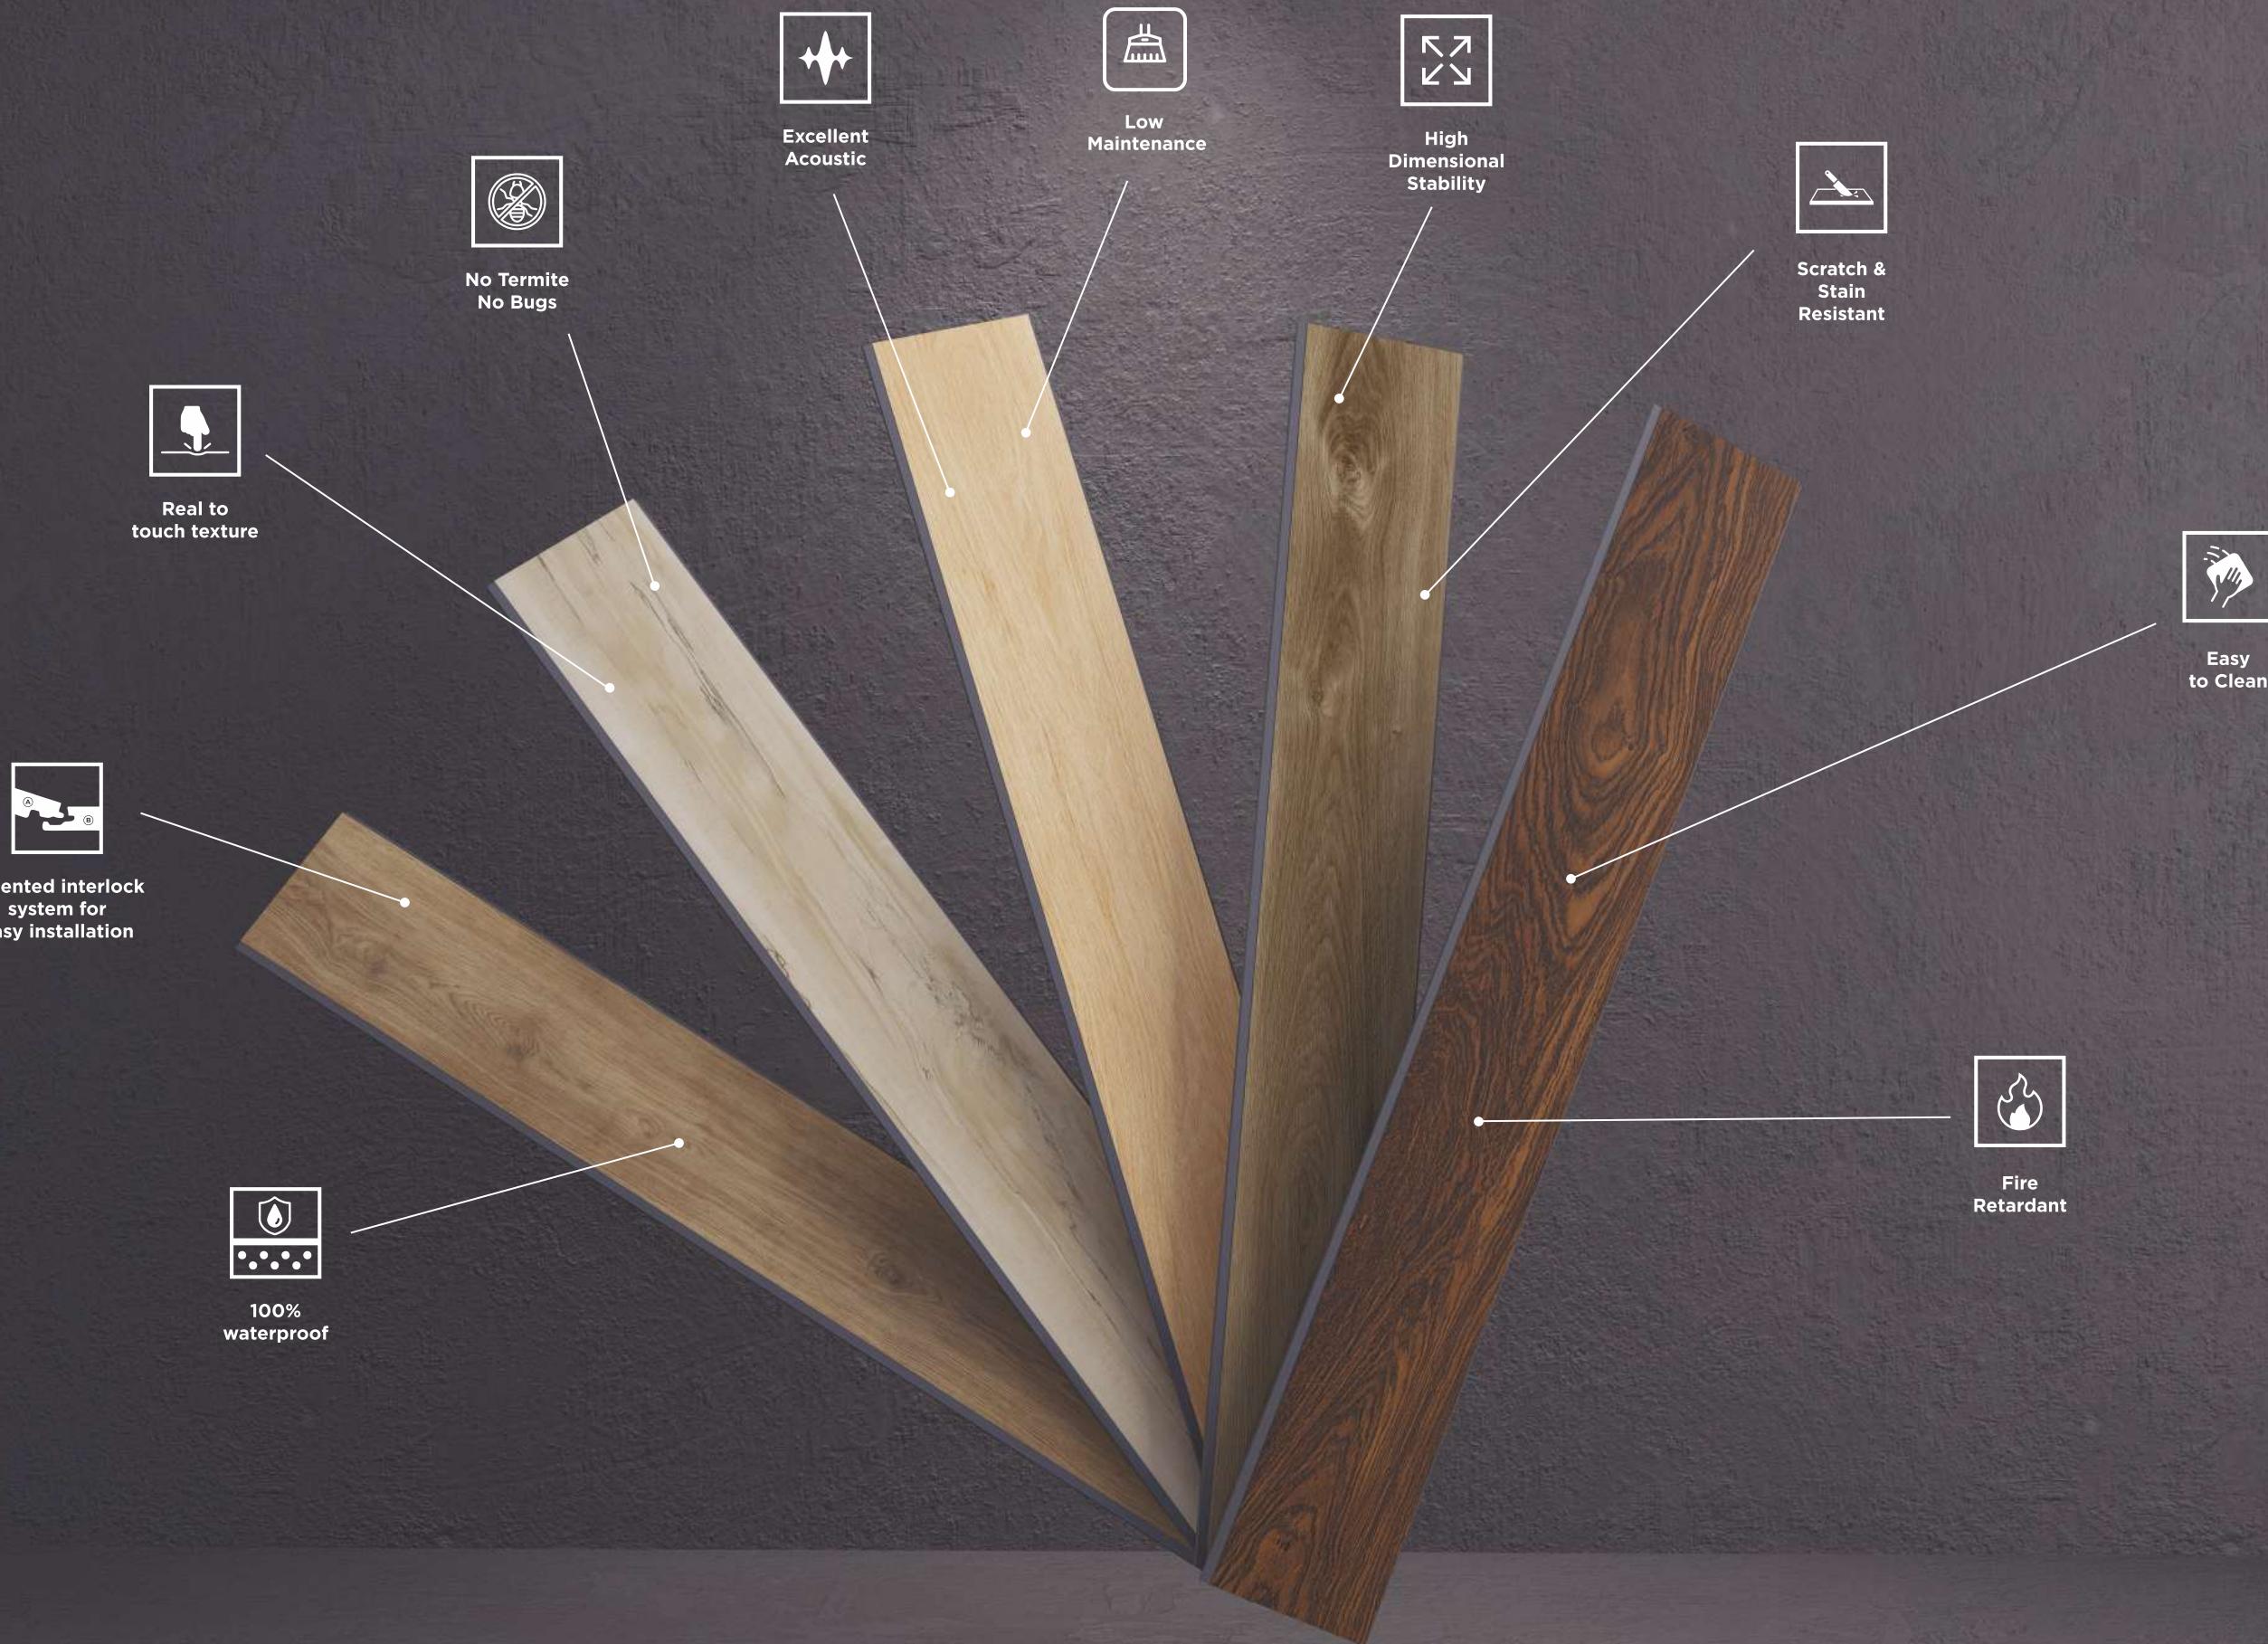

Experience unmatched comfort and quietness as our SPC Flooring is designed to reduce noise, creating a peaceful ambiance in your home. Along with that, it has many qualities like being water proof, low maintenance, kid-friendly, family friendly, and quick to install.

So, Don't compromise on quality – choose our SPC Flooring for the best quality at the best price at Our.




VARIETIES

of colors

Rigid core flooring from Our, blends the beauty of wood with the sturdiness of stone. We provide an array of SPC Flooring alternatives to make your space distinctive. Despite being adaptable and durable, our flooring follows a methodology that takes into account specific placement and space constraints. Inspired by the true nature of Earthy hues and textures, each of these is inventively manufactured and has a unique characteristic which makes it perfect for a variety of applications.

PRODUCT

Structure

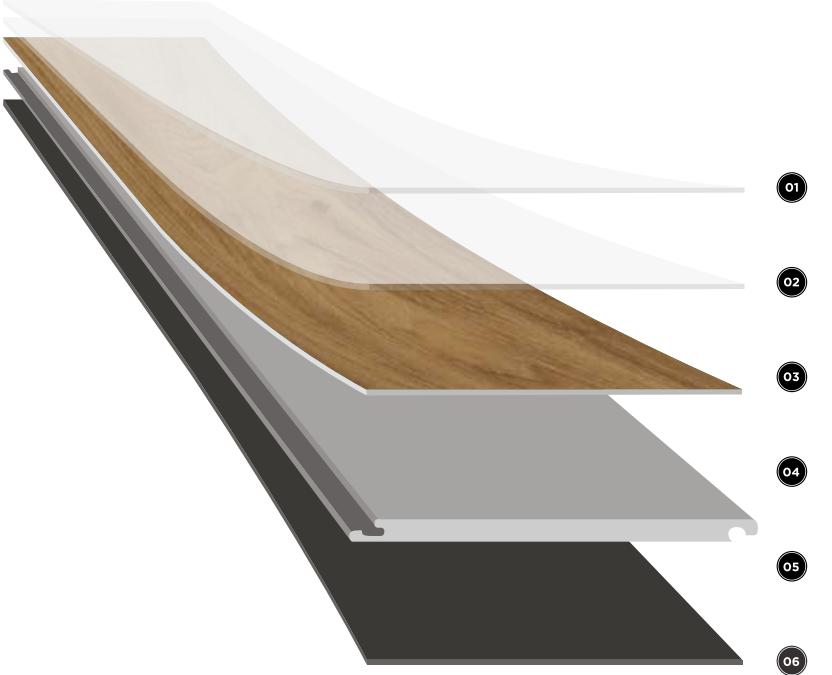

01 UV Coating

It is the topmost layer of our SPC floors. A UV-cured coating is applied to the surface of the flooring and hardened using UV light. This layer provides added protection against fading, or discoloration caused by exposure to sunlight. This layer also renders a stain-free quality and is responsible for the matt finish.

02 Wear Layer

on SPC floors is a clear, protective layer that is applied on top of the design layer. It is made of a durable material that helps to resist scratches and wear from foot traffic. This layer is important because it helps to prolong the life of the flooring and keep it looking new for longer.

03 PVC Decorative Layer

The decor film layer on SPC (Stone Polymer Composite) floors is a thin, printed layer that is applied on top of the core layer. The decor film layer is important because it gives the flooring its aesthetic appeal, allowing it to mimic the look of natural wood or other materials while providing the durability and resistance of spc.

04 SPC Board

The core layer of the floors is the main structural layer made from a mixture of polymer Resin and Natural stone composition, which gives it strength and stability and also contributes to its waterproof property. The SPC core layer is also dense and stable, it makes the SPC flooring much more durable and resistant to wear and tear compared to traditional vinyl flooring.

05 UNICLIC® Locking Technology

This Unique Feature Makes the SPC floors so easy to install and DIY-friendly. At KEO Surface our floors have a patented locking mechanism (Unilin) which allows a floating installation and keeps the floors attached more effectively. This layer also ensures that no adhesives or materials are required for installation.


06 Underlayment

This layer contributes to additional cushioning stability and sound insulation for the flooring. It is typically made of high-density IXPE or EVA attached beneath the Core.





PRODUCT SIZES

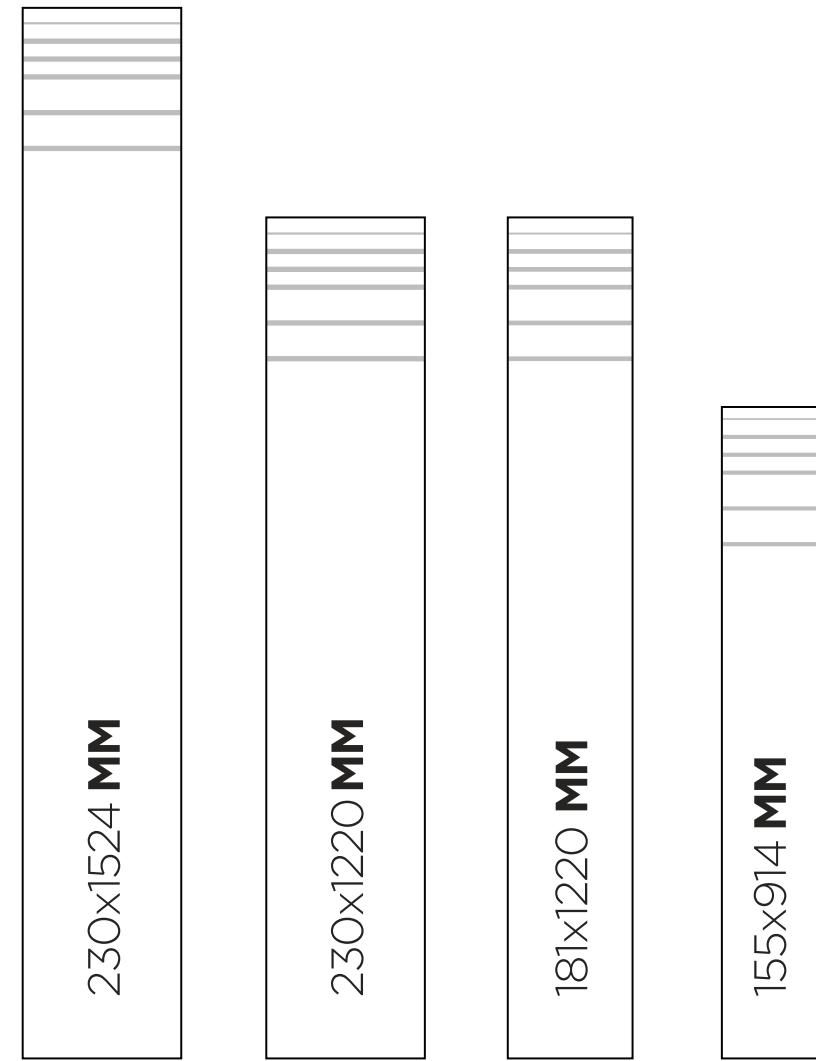

Minimum
Thickness (5 mm)

Maximum
Thickness (7.5 mm)


LUXE
COLLECTION



It's a perfect mimic of the look and feel of natural materials yet more appealing and easy to maintain
compare to others natural flooring along with the same classy and elegant vibes.

AVAILABLE COLORS

LUXE
COLLECTION

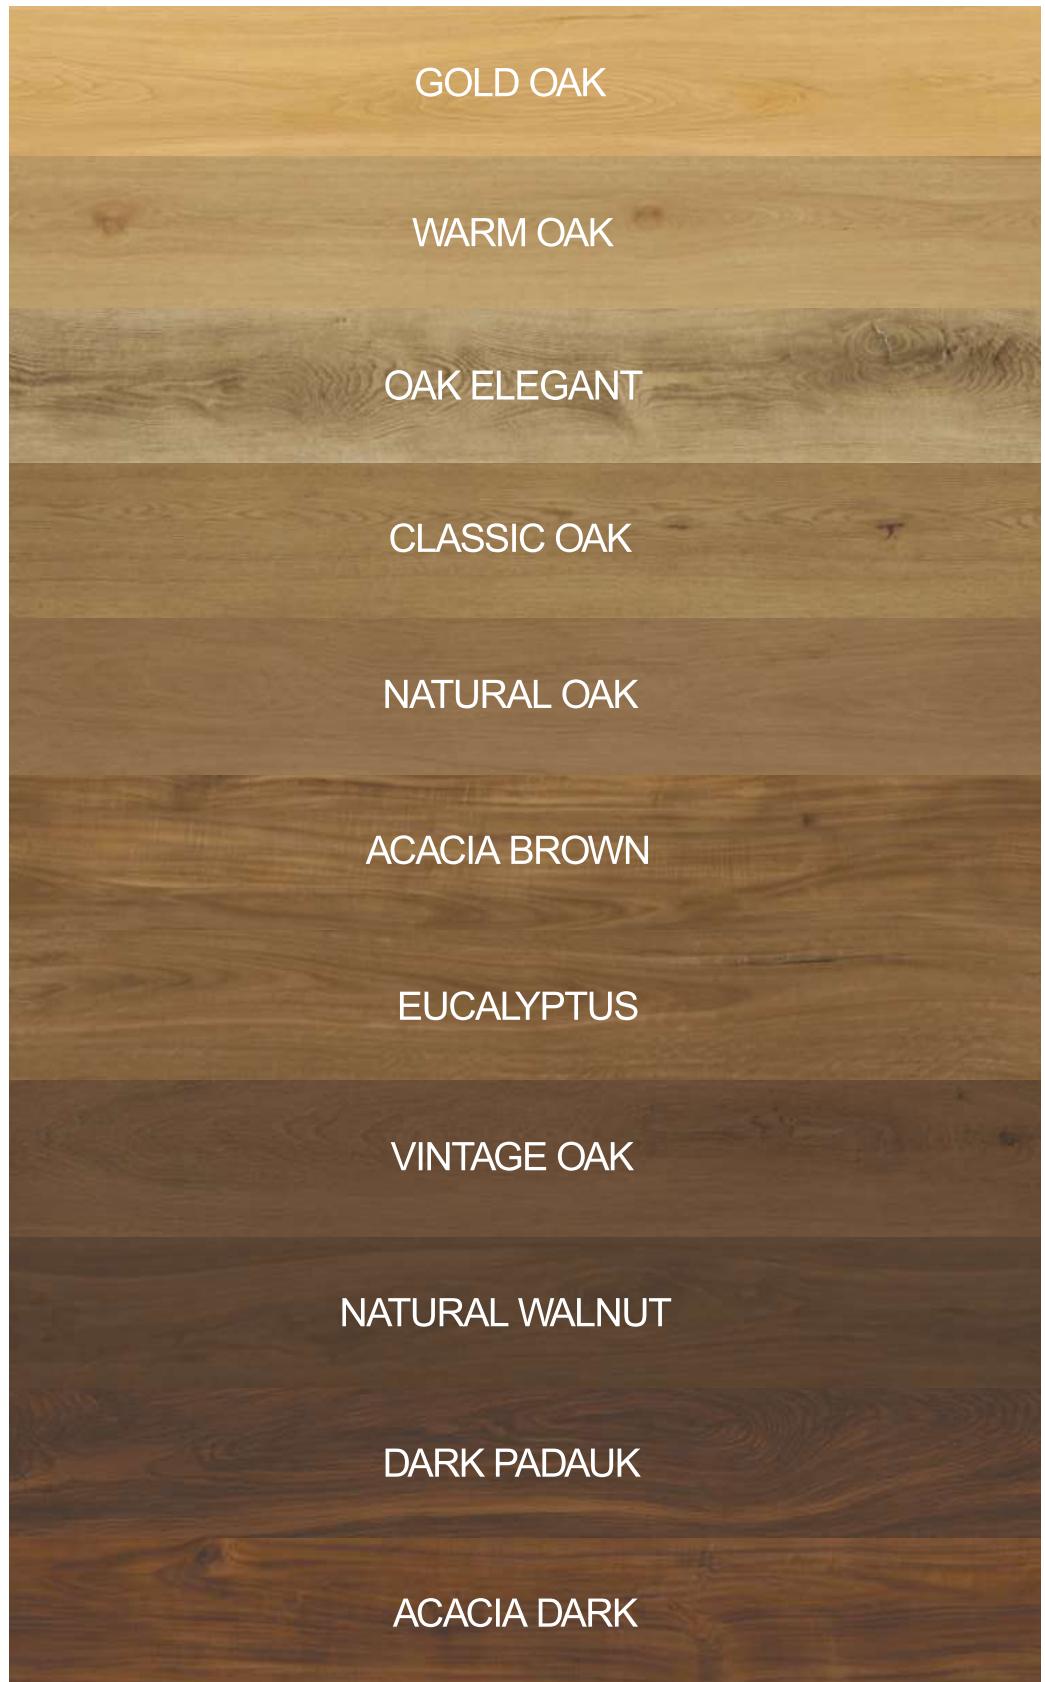

GOLD OAK



GOLD OAK





GOLD OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

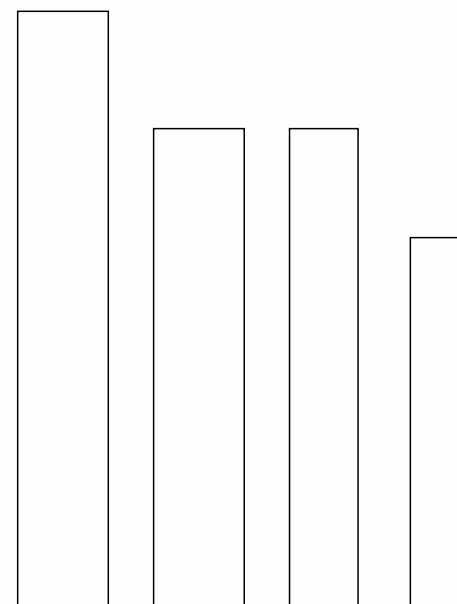

WARM OAK



WARM OAK






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

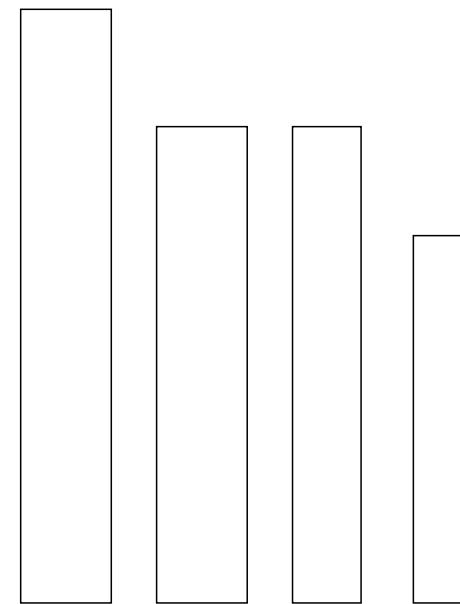

WARM OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



OAK ELEGANT



OAK ELEGANT






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

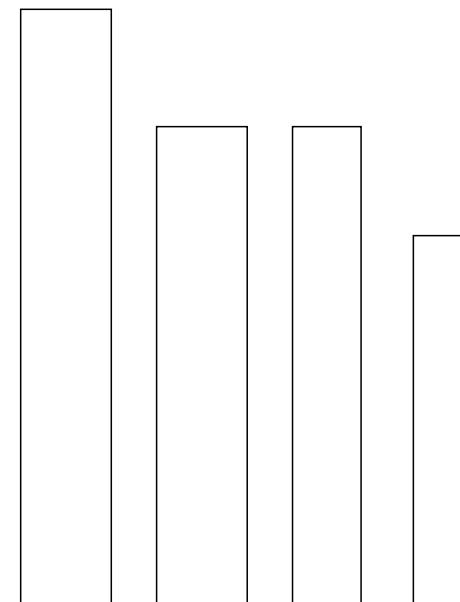


OAK ELEGANT


TOTAL THICKNESS
5 TO 7.5 MM

SURFACE
EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



CLASSIC OAK



CLASSIC OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

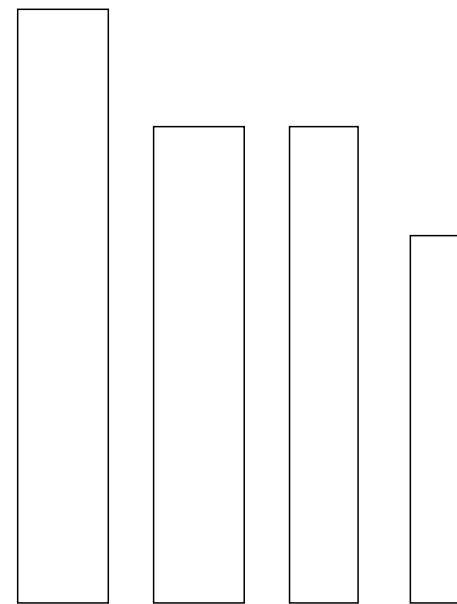

CLASSIC OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



NATURAL OAK



NATURAL OAK






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

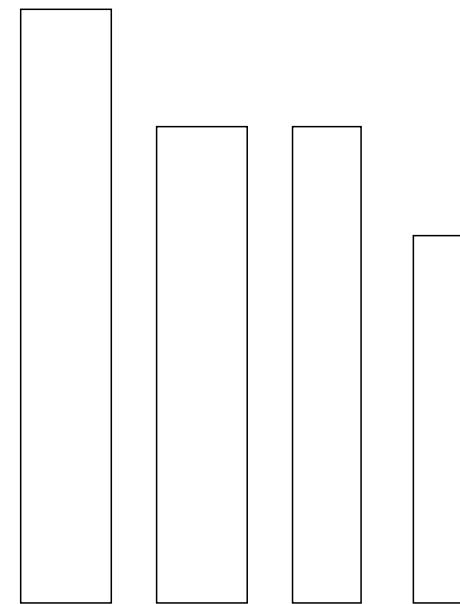

NATURAL OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



ACACIA BROWN



ACACIA BROWN






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

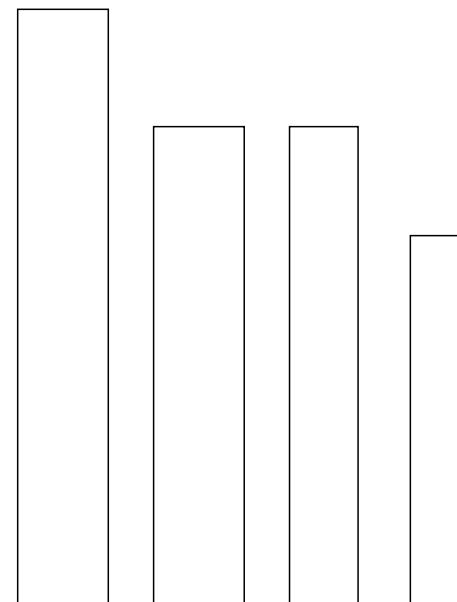

ACACIA BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



EUCALYPTUS



EUCALYPTUS






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

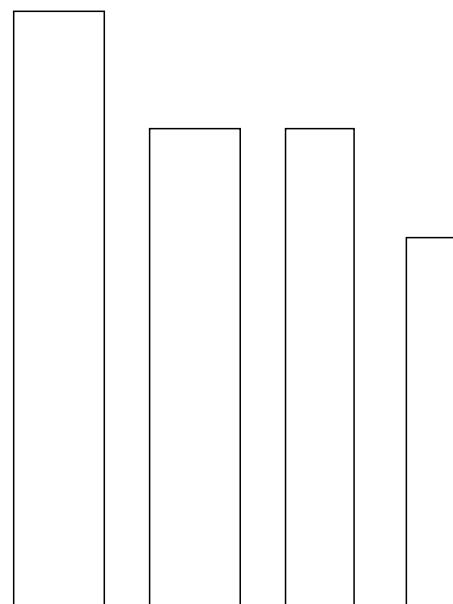

EUCALYPTUS


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



VINTAGE OAK



VINTAGE OAK





PRO
DETAILING



VINTAGE OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM




HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

155X914 MM

- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

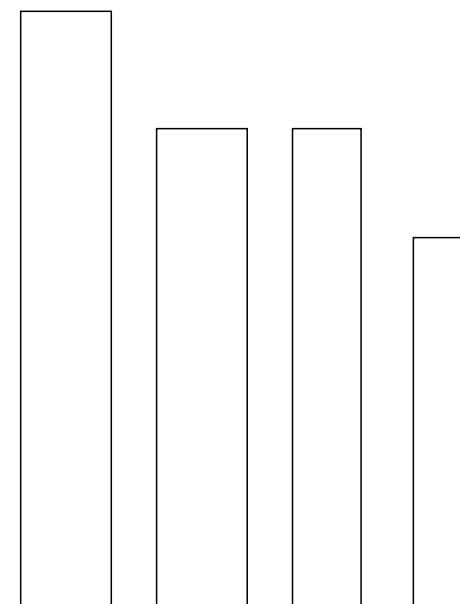

NATURAL WALNUT




NATURAL WALNUT





SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

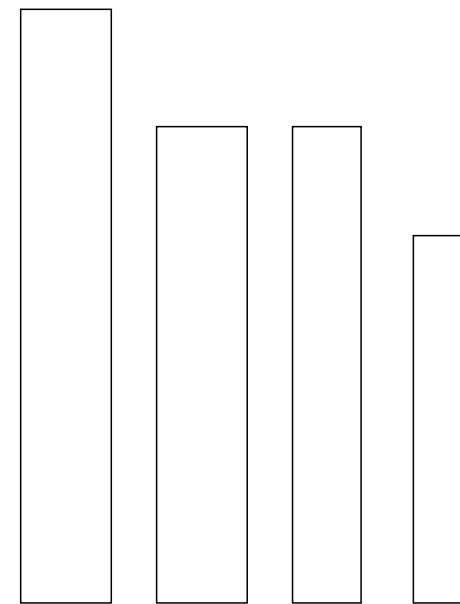

NATURAL WALNUT


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



DARK PADAUK



DARK PADOUK






**PRO
DETAILING**

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

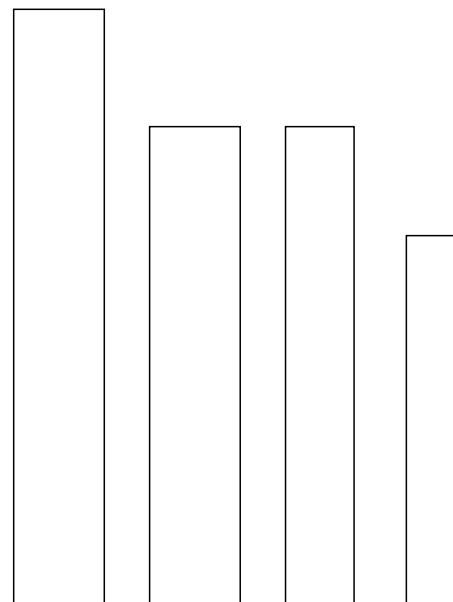

DARK PADAUK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING


FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

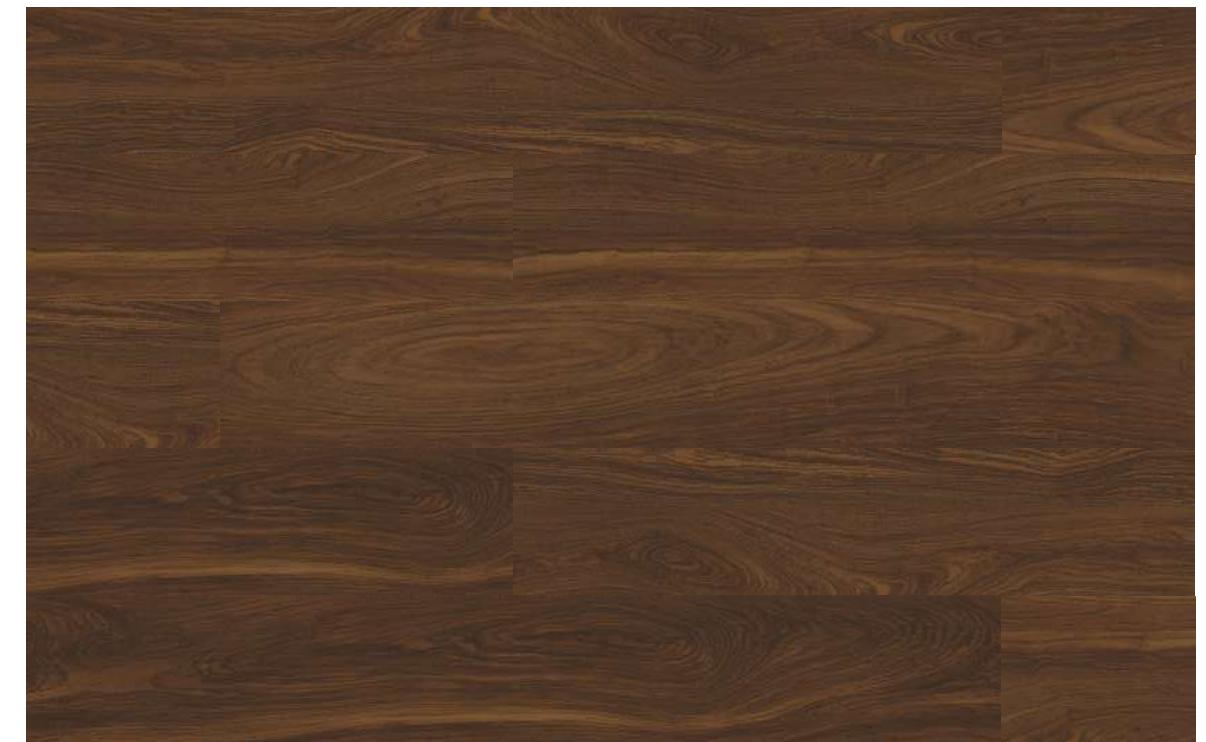

ACACIA DARK



ACACIA DARK






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

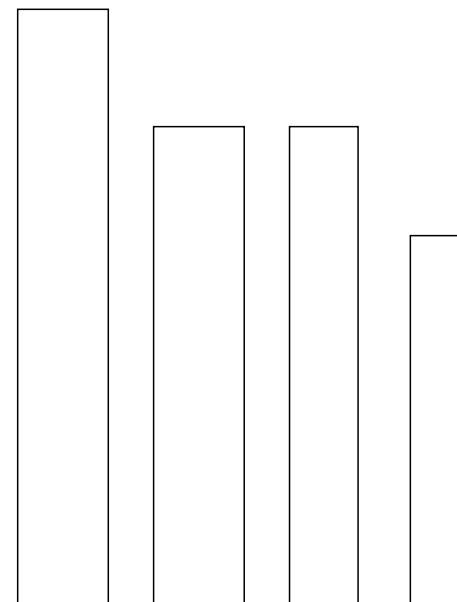

ACACIA DARK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)




PRIME
COLLECTION

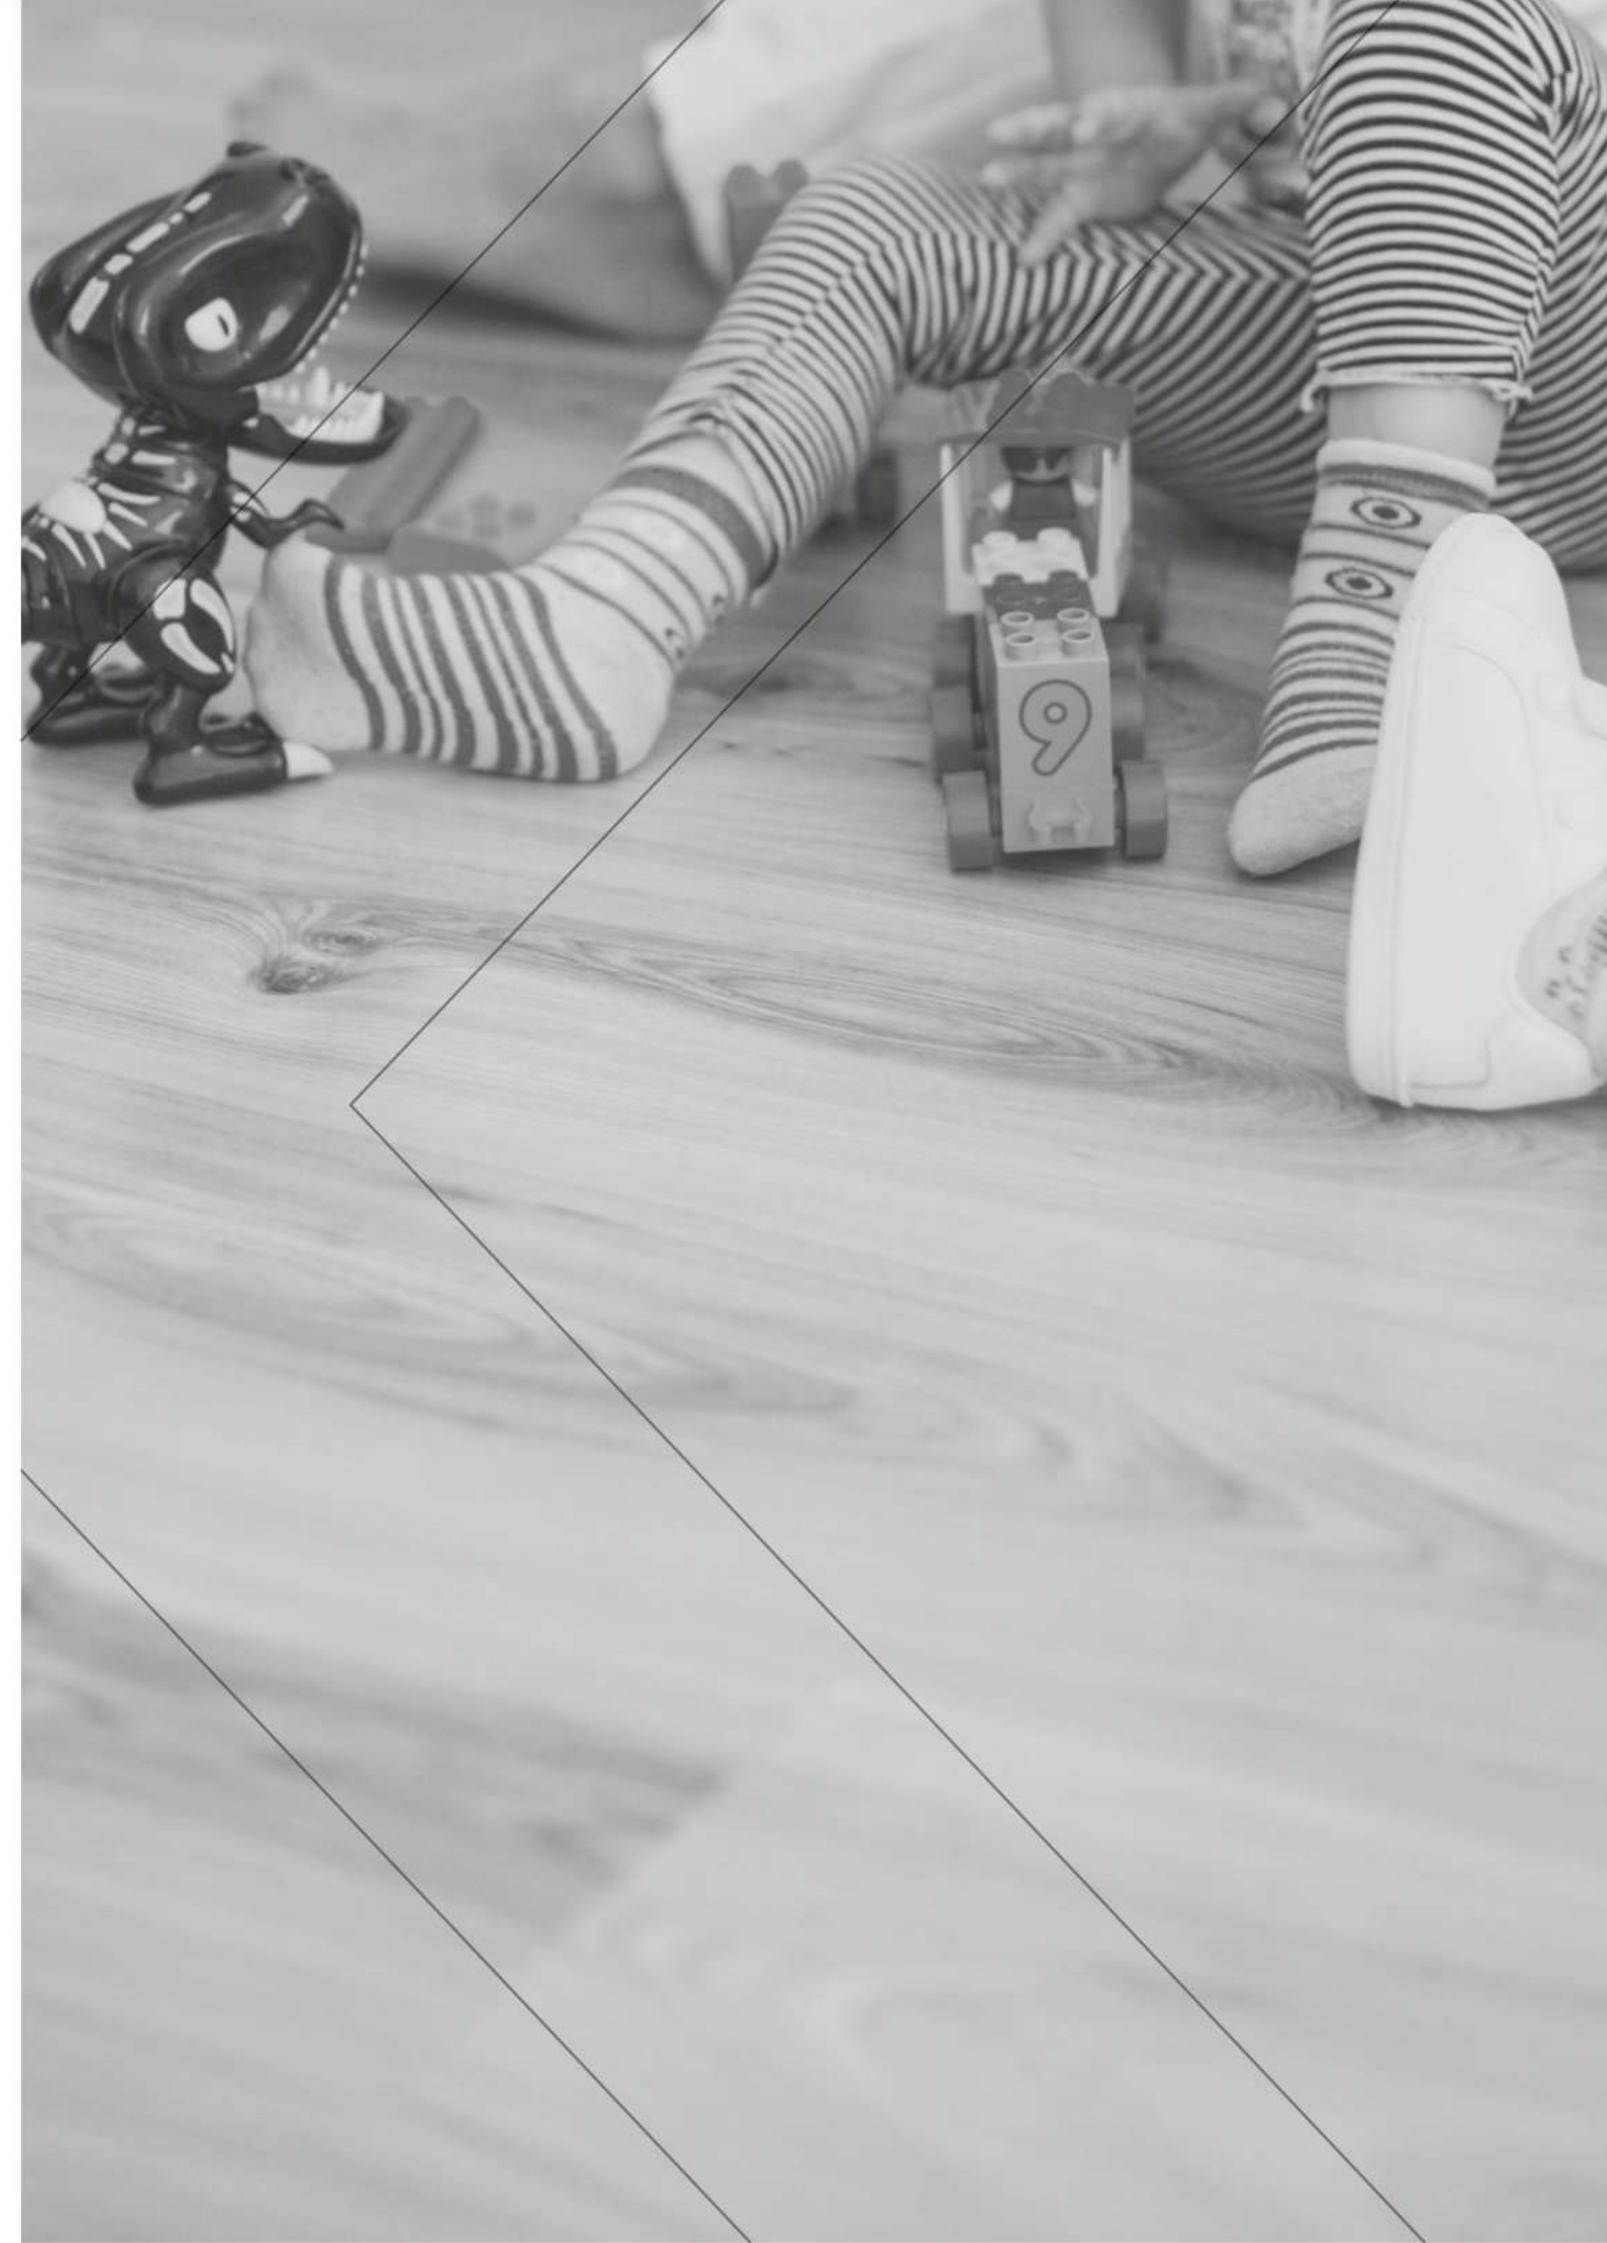

AVAILABLE COLORS

PRIME
COLLECTION

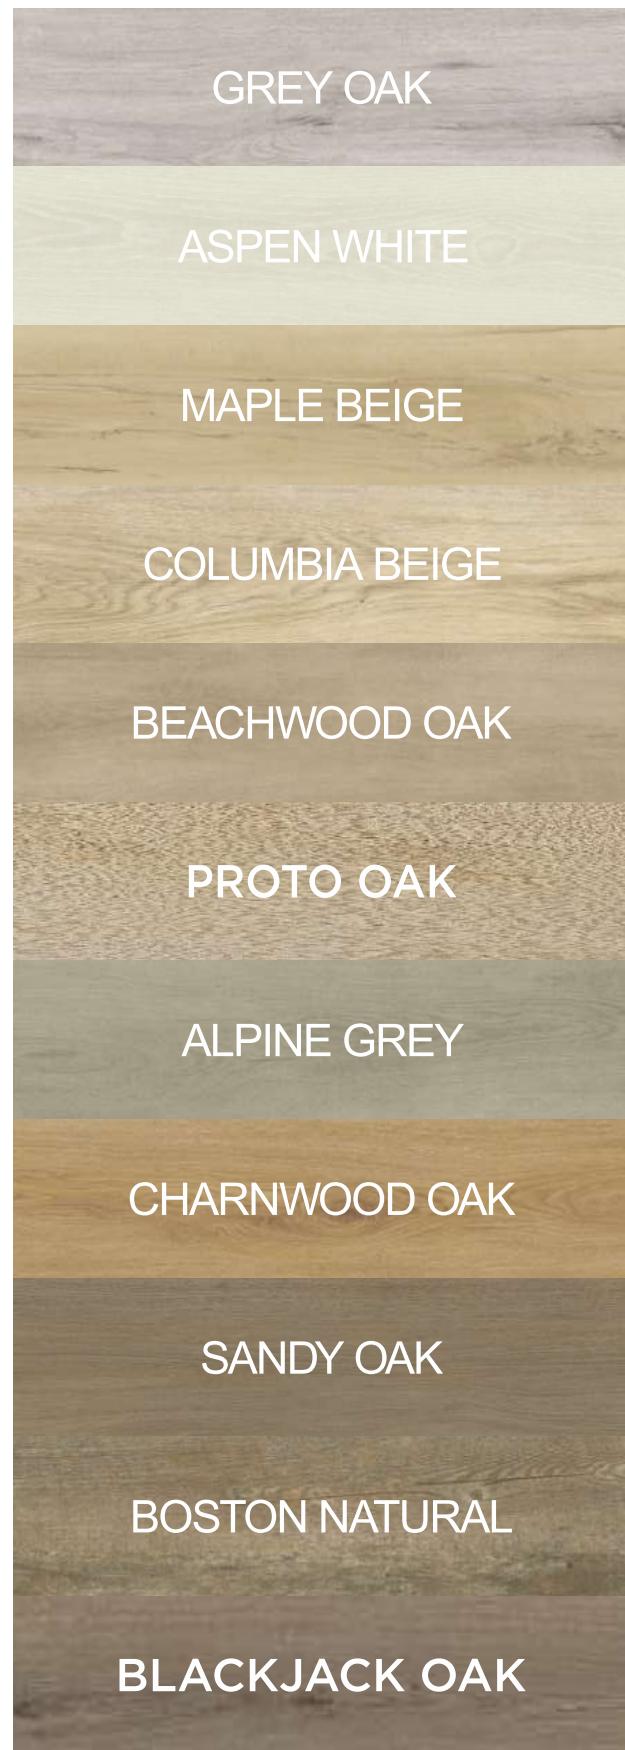

GREY OAK






GREY OAK



**PRO
DETAILING**

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

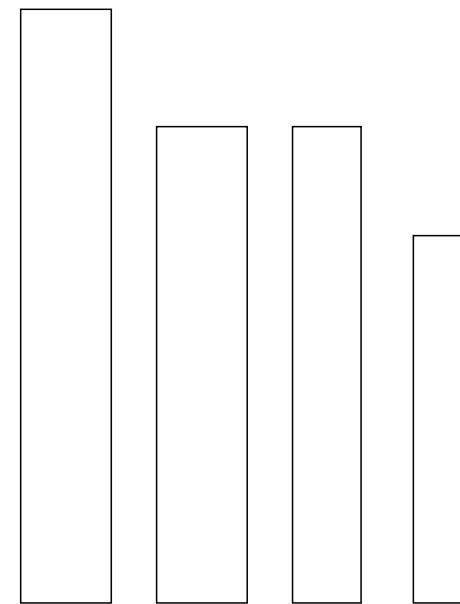

GREY OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



ASPEN WHITE



ASPEN WHITE





ASPEN WHITE


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

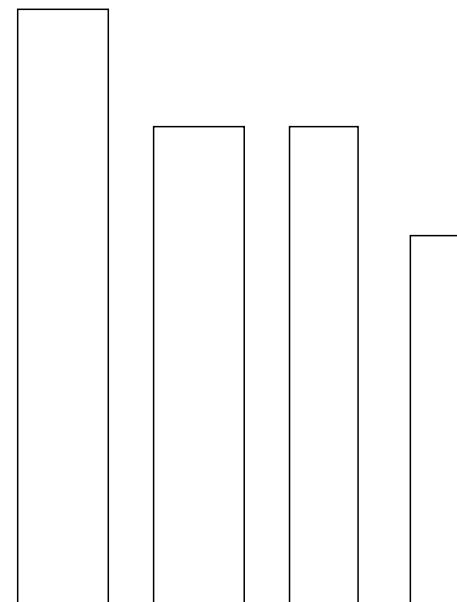

MAPLE BEIGE




MAPLE BEIGE





SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

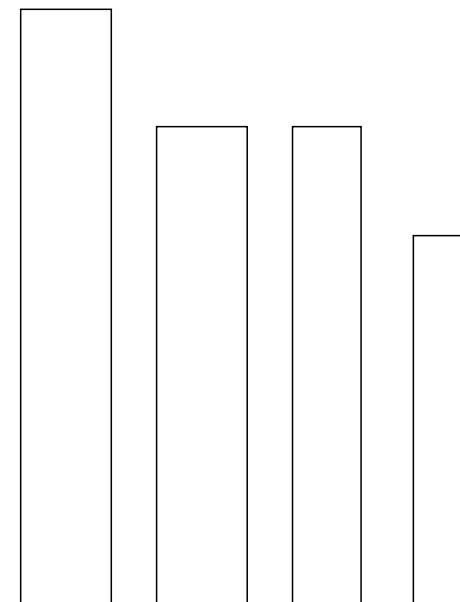

MAPLE BEIGE


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



COLUMBIA BEIGE



COLUMBIA BEIGE






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

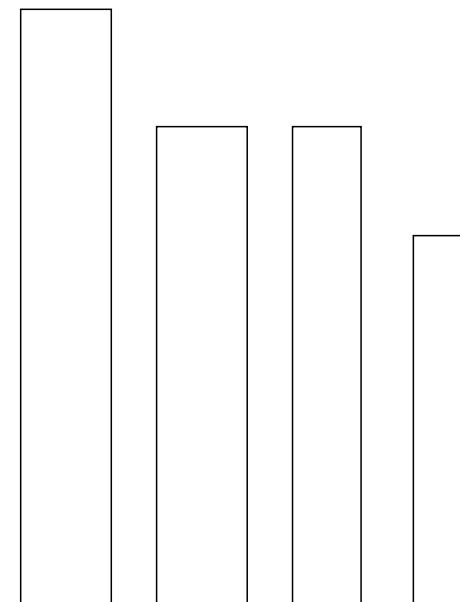

COLUMBIA BEIGIE


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



BEACHWOOD OAK



BEACHWOOD OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

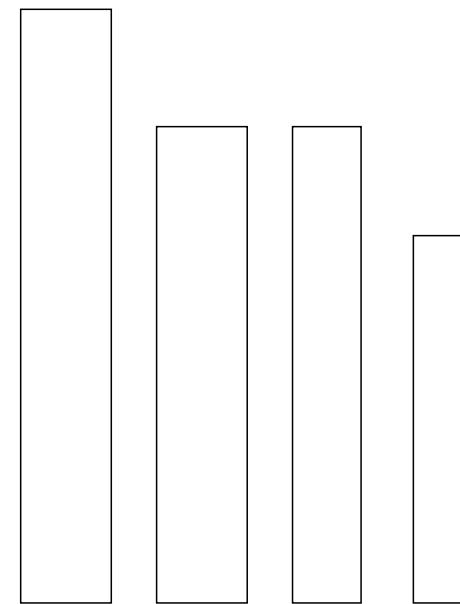

BEACHWOOD OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



PROTO OAK



PROTO OAK






**PRO
DETAILING**

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

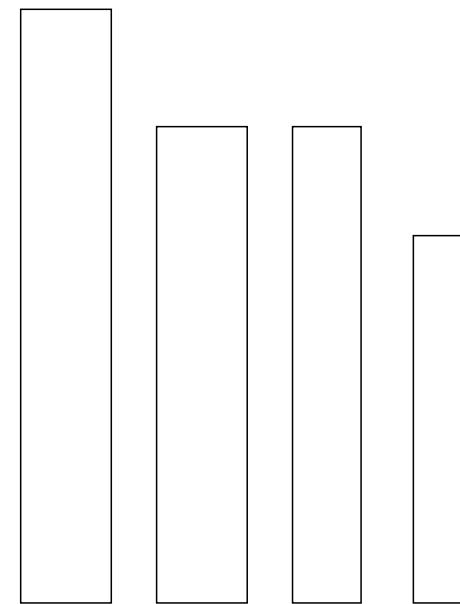

PROTO OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



ALPINE GREY




ALPINE GREY





SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

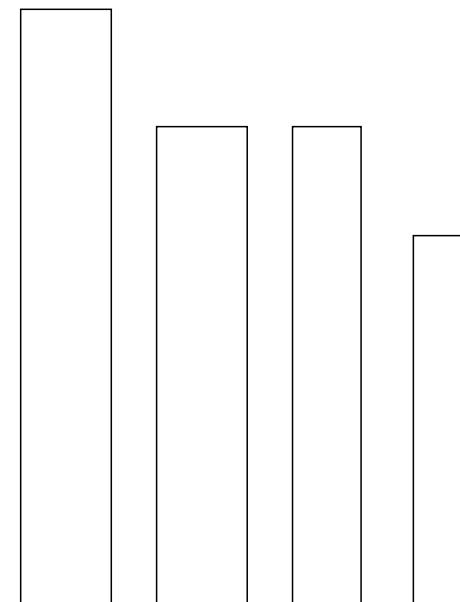

ALPINE GREY


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



CHARNWOOD OAK



CHARNWOOD OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

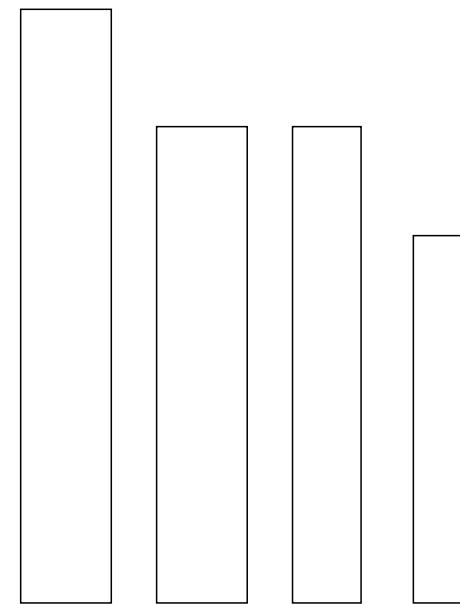

CHARNWOOD OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



SANDY OAK



SANDY OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

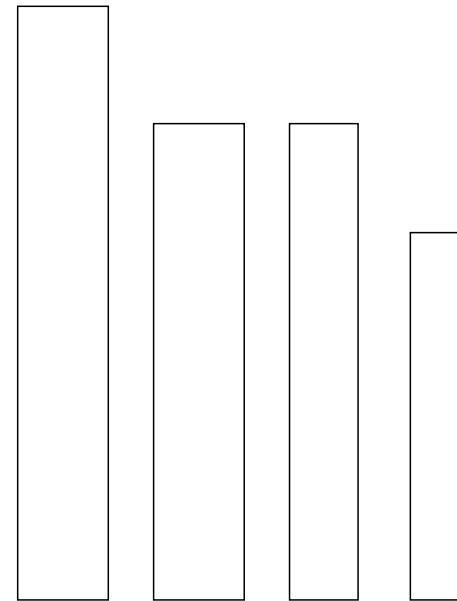

SANDY OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBORESSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



BOSTON NATURAL



BOSTON NATURAL






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

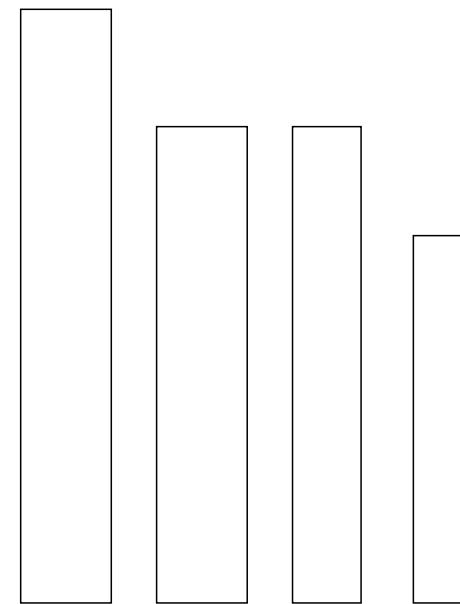

BOSTON NATURAL


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



BLACKJACK OAK



BLACKJACK OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

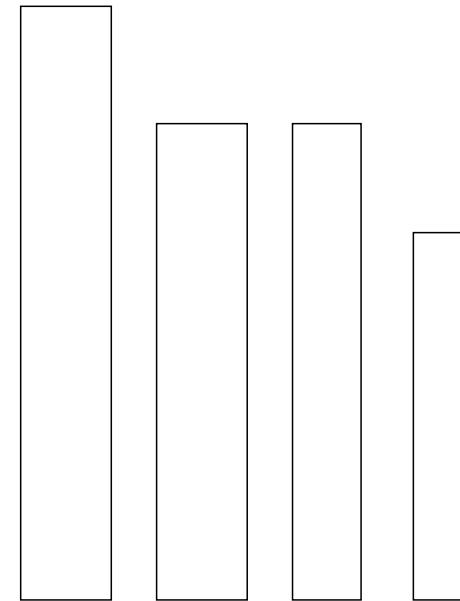

BLACKJACK OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



FANCY OAK



FANCY OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

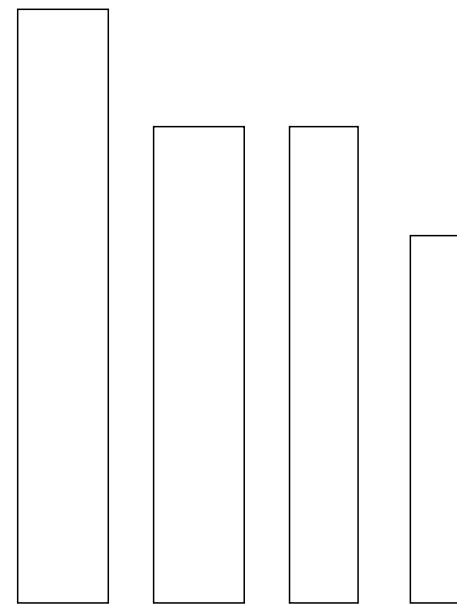

FANCY OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



PARKHURST OAK



PARKHURST OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

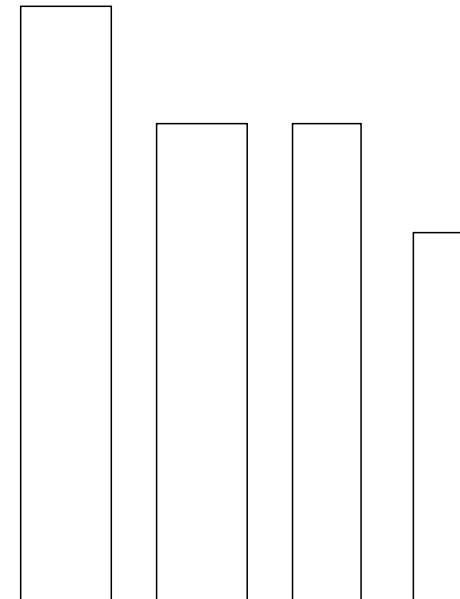

PARKHURST OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



MAPLE BROWN




MAPLE BROWN





SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

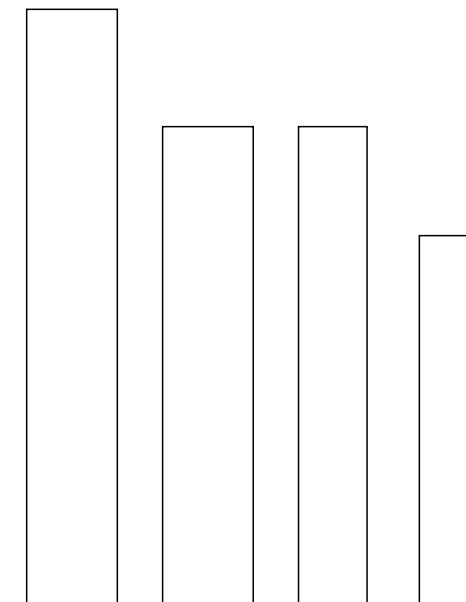

MAPLE BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



RUSTY BROWN



RUSTY BROWN






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

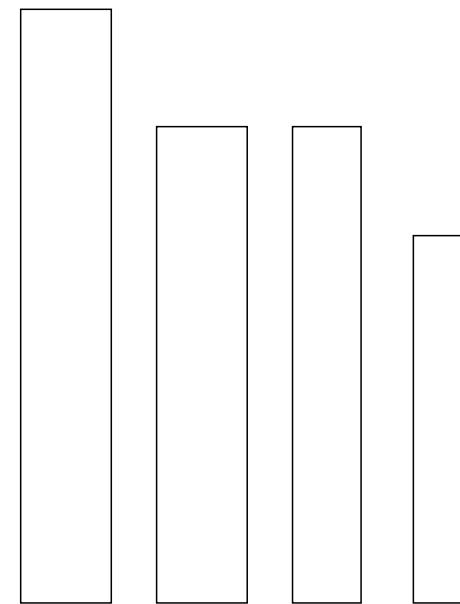

RUSTY BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)





SESSILE OAK

SESSILE OAK






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

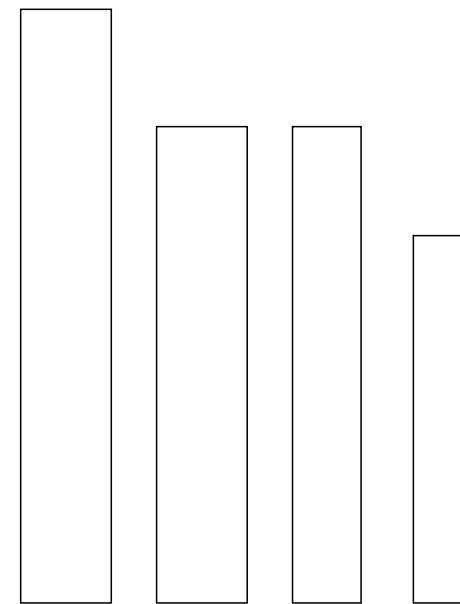

SESSILE OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



EMORY OAK



EMORY OAK






PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

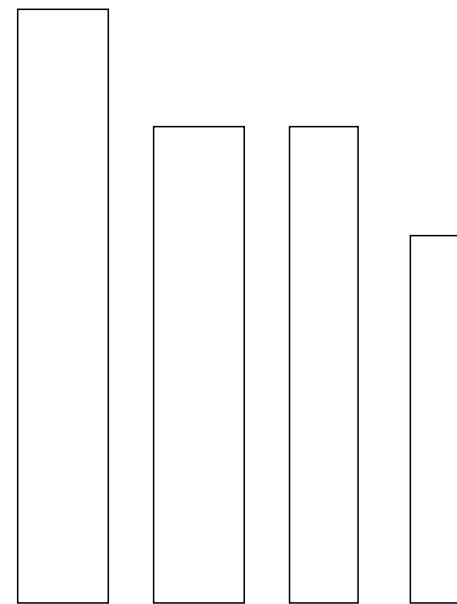

EMORY OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)





DALLAS BROWN

DALLAS BROWN






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

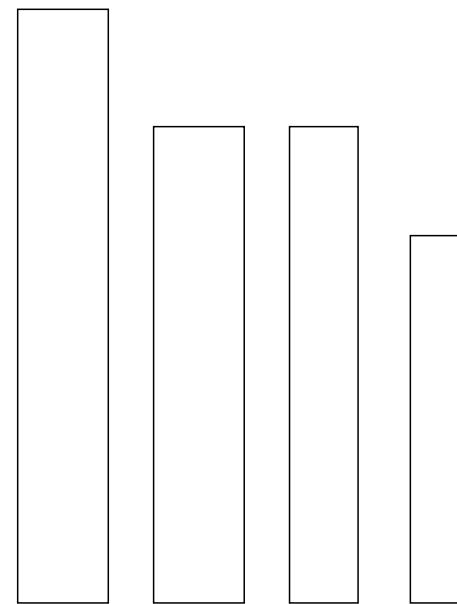

DALLAS BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



BOSTON GREY



BOSTON GREY






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

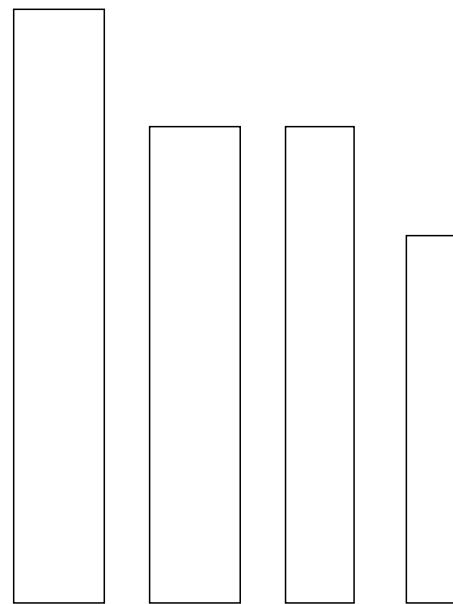

BOSTON GREY


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



ASH MIX



ASH MIX






PRO
DETAILING

SIZES

155X914 MM
•
181X1220 MM
•
230X1220 MM
•
230X1524 MM

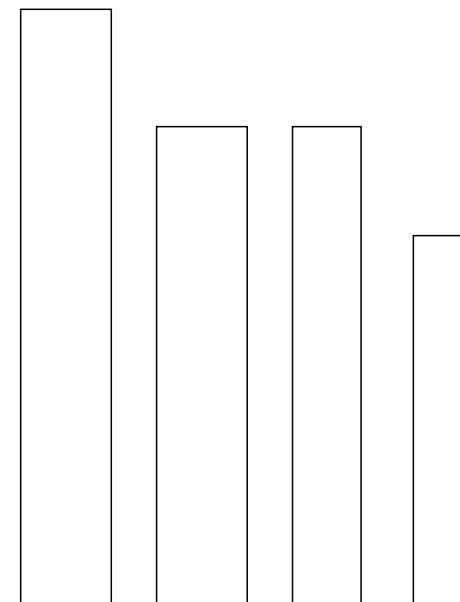

ASH MIX


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



CHICAGO GRIS



CHICAGO GRIS






**PRO
DETAILING**



SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

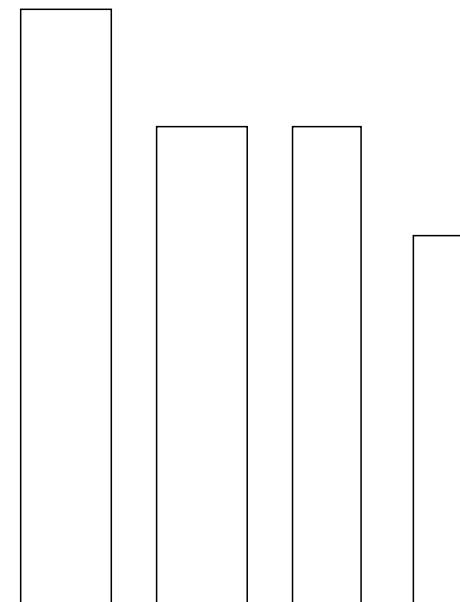

CHICAGO GRIS


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



PINE CHARCOAL




PINE CHARCOAL





SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

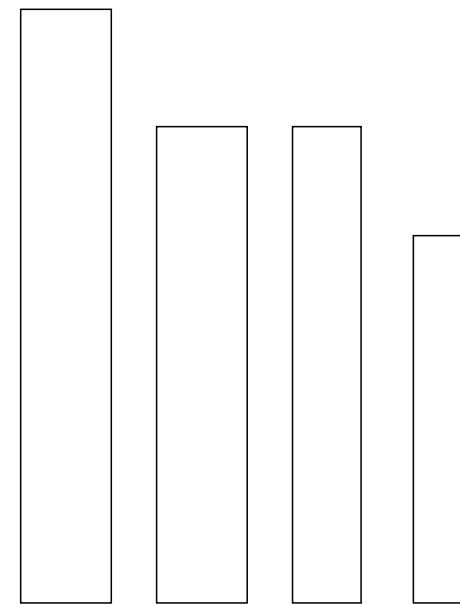

PINE CHARCOAL


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



TECHNICAL DATA


SYMBOL	PARAMETER	TEST STANDARD	SPECIFICATION / CRITERIA	RESULT
	Dimensional Stability	ISO 23999	< 0.10 mm	PASS
	Curling	ISO 23999	< 1 mm	PASS
	Micro scratch resistant	EN 16094	> 25000 Cycle(4N Load), <A2	PASS
	Residual Indentation	ACTME 1914	< 0.10 mm	PASS
	Shore D hardness	ASTM D 2240	> 15 to < 70 HD	PASS
	Scratch Resistance	—	> 6 N	PASS
	Abrasion Resistance	EN 13329	AC4 (> 4000 cycle)	PASS
	Pill strength	EN 24345	> 50 N / 50 mm	PASS
	Locking Strength	ISO 24334	> 250 N / 100 mm	PASS
	Density	ASTM D 792	1.95 TO 2.05 g/cm³	PASS
	Dimensional Variation After change in Relative humidity	EN 13329:2016	Long side <0.9mm Short side <0.9mm	PASS
	Large Ball Impact test	EN 438	1600 mm Height (320 gm load)	PASS






INSTALLATION


Installation is fast and easy thanks to the unique click lock system. Click Lock Technology works perfectly for both the long and short sides of the flooring panel and ensures there are no unwanted gaps or spaces between floorboards.




Start at a corner, tongue side facing wall, with spacers for an 8-12 mm expansion gap.




Assemble the second row on the subfloor, tilt and push to attach to the first row, then click into place.




Insert the second plank's end tongue into the first plank's end groove at an angle, then click into place.




Begin the next row with the last cut-off piece from the previous row




For the last plank of a row, measure, mark, score, and snap off the required length, then insert.




For heating vents, cut the plank to length, measure and mark areas to cut out, then cut allowing for expansion.



Begin the next row with the last cut-off piece from the previous row.



Trim door frames by placing a plank upside down next to the frame and cutting to the necessary height.



PACKING DETAILS

SPC Packing Details - 181x1220 MM

THICKNESS	BOX		PALLET			CONTAINER			
	PCS	SQM	BOX	SQM	WT-GROSS	PALLET	BOX	SQM	WT
4+1	10	2.21	75	166	1380	20	1500	3315	27600
5+1.5	08	1.77	75	133	1373	20	1500	2655	26850
6+1.5	07	1.55	75	116	1444	19	1425	2209	27431

****For Other Sizes And Thicknesses Please Contact Us.**

Discover the unmatched uniqueness and exclusivness with Ouras we don't compromise on quality either it comes to product or packaging. We have varieties of sizes as per our wide range of stunning designs and finishes to protect and maintain there Style.

