


Metosis


Size: 600x1200mm | Finishes: Polished & Matt | Thickness: 9mm

PRESENTING
Metosis



Transform your space with the subtle details that can add a layer of intricacy while maintaining a minimalist look. With soft and muted tones, create a warm & inviting abode that crafts a soulful balance between aesthetics & style.

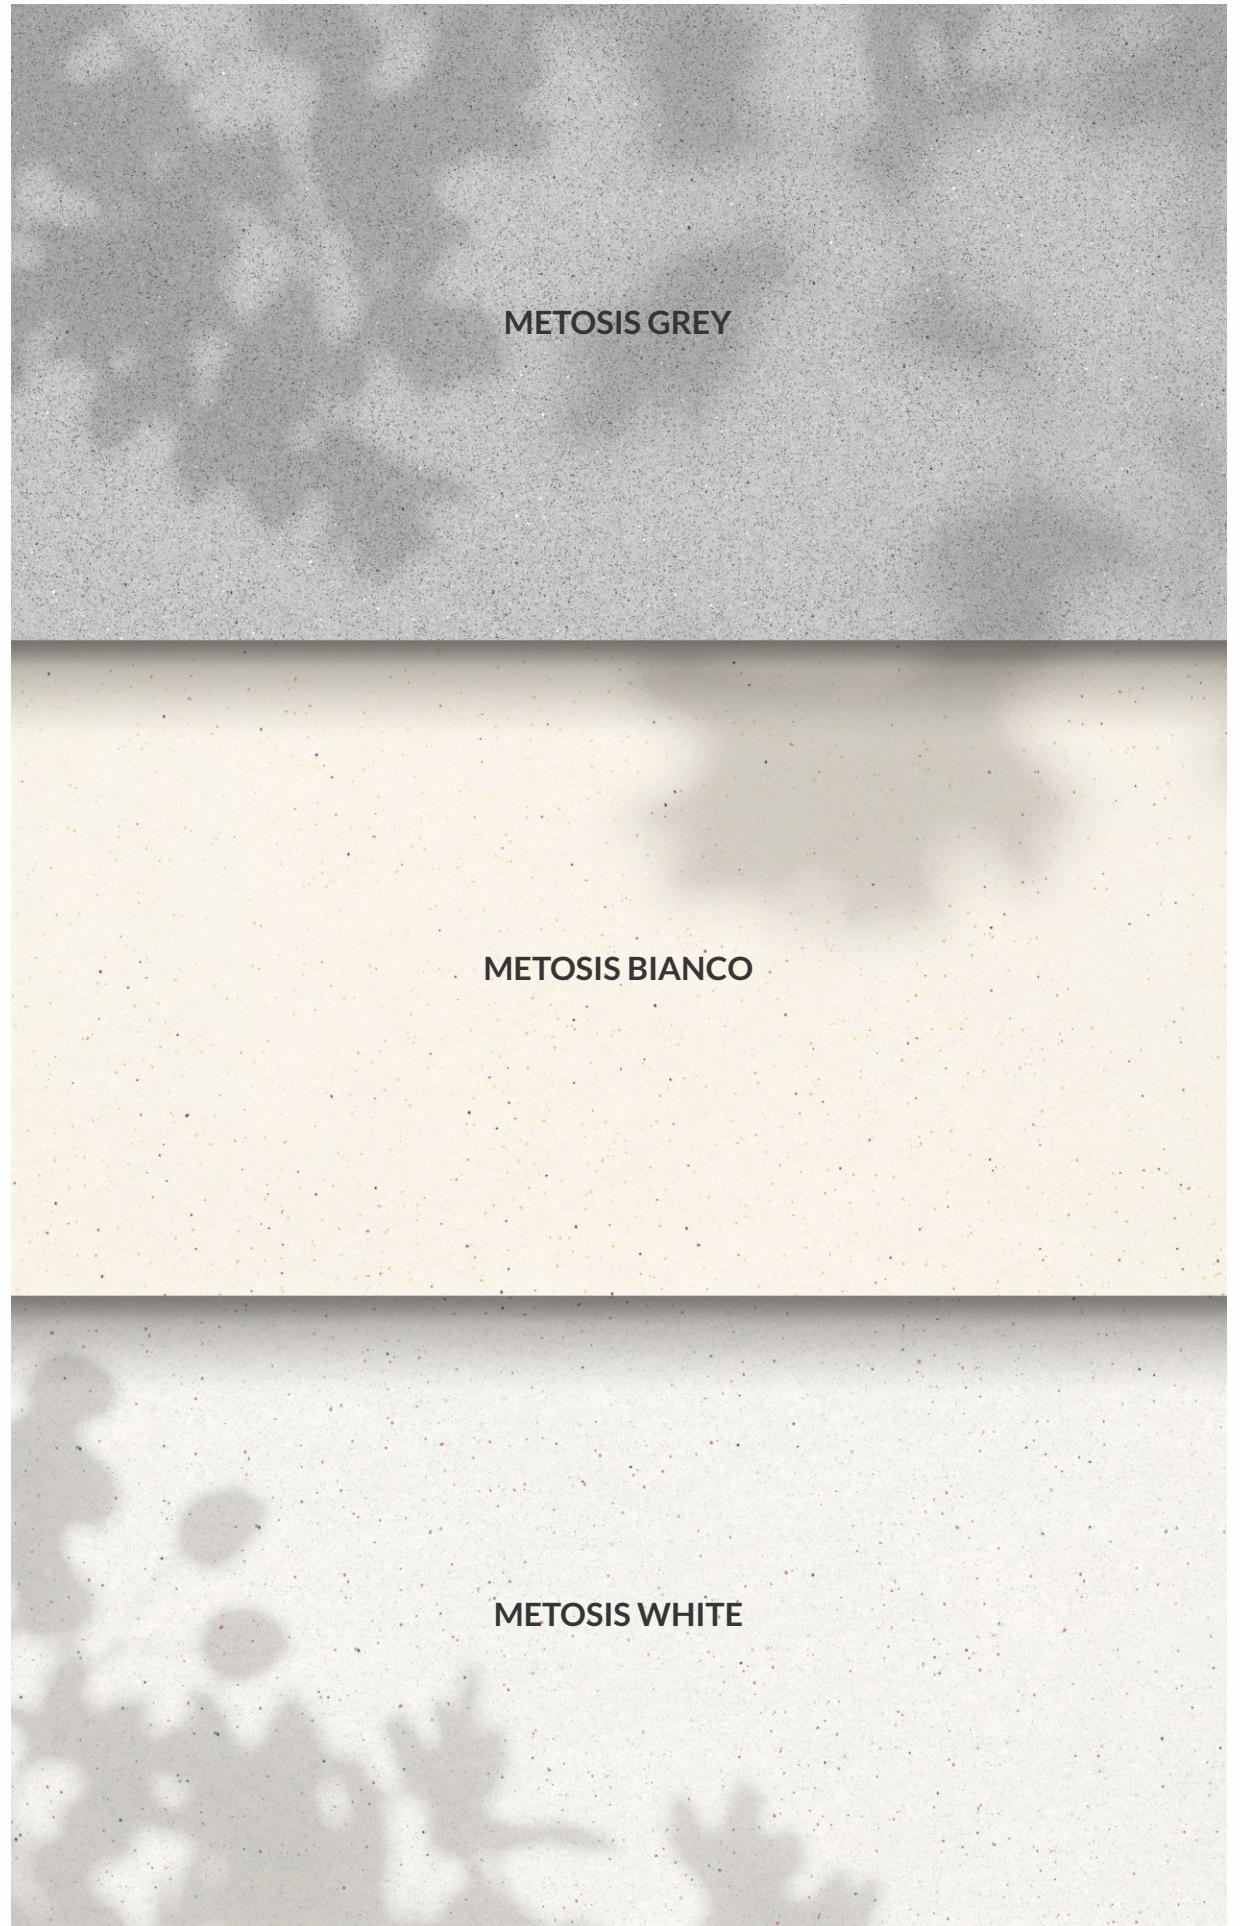

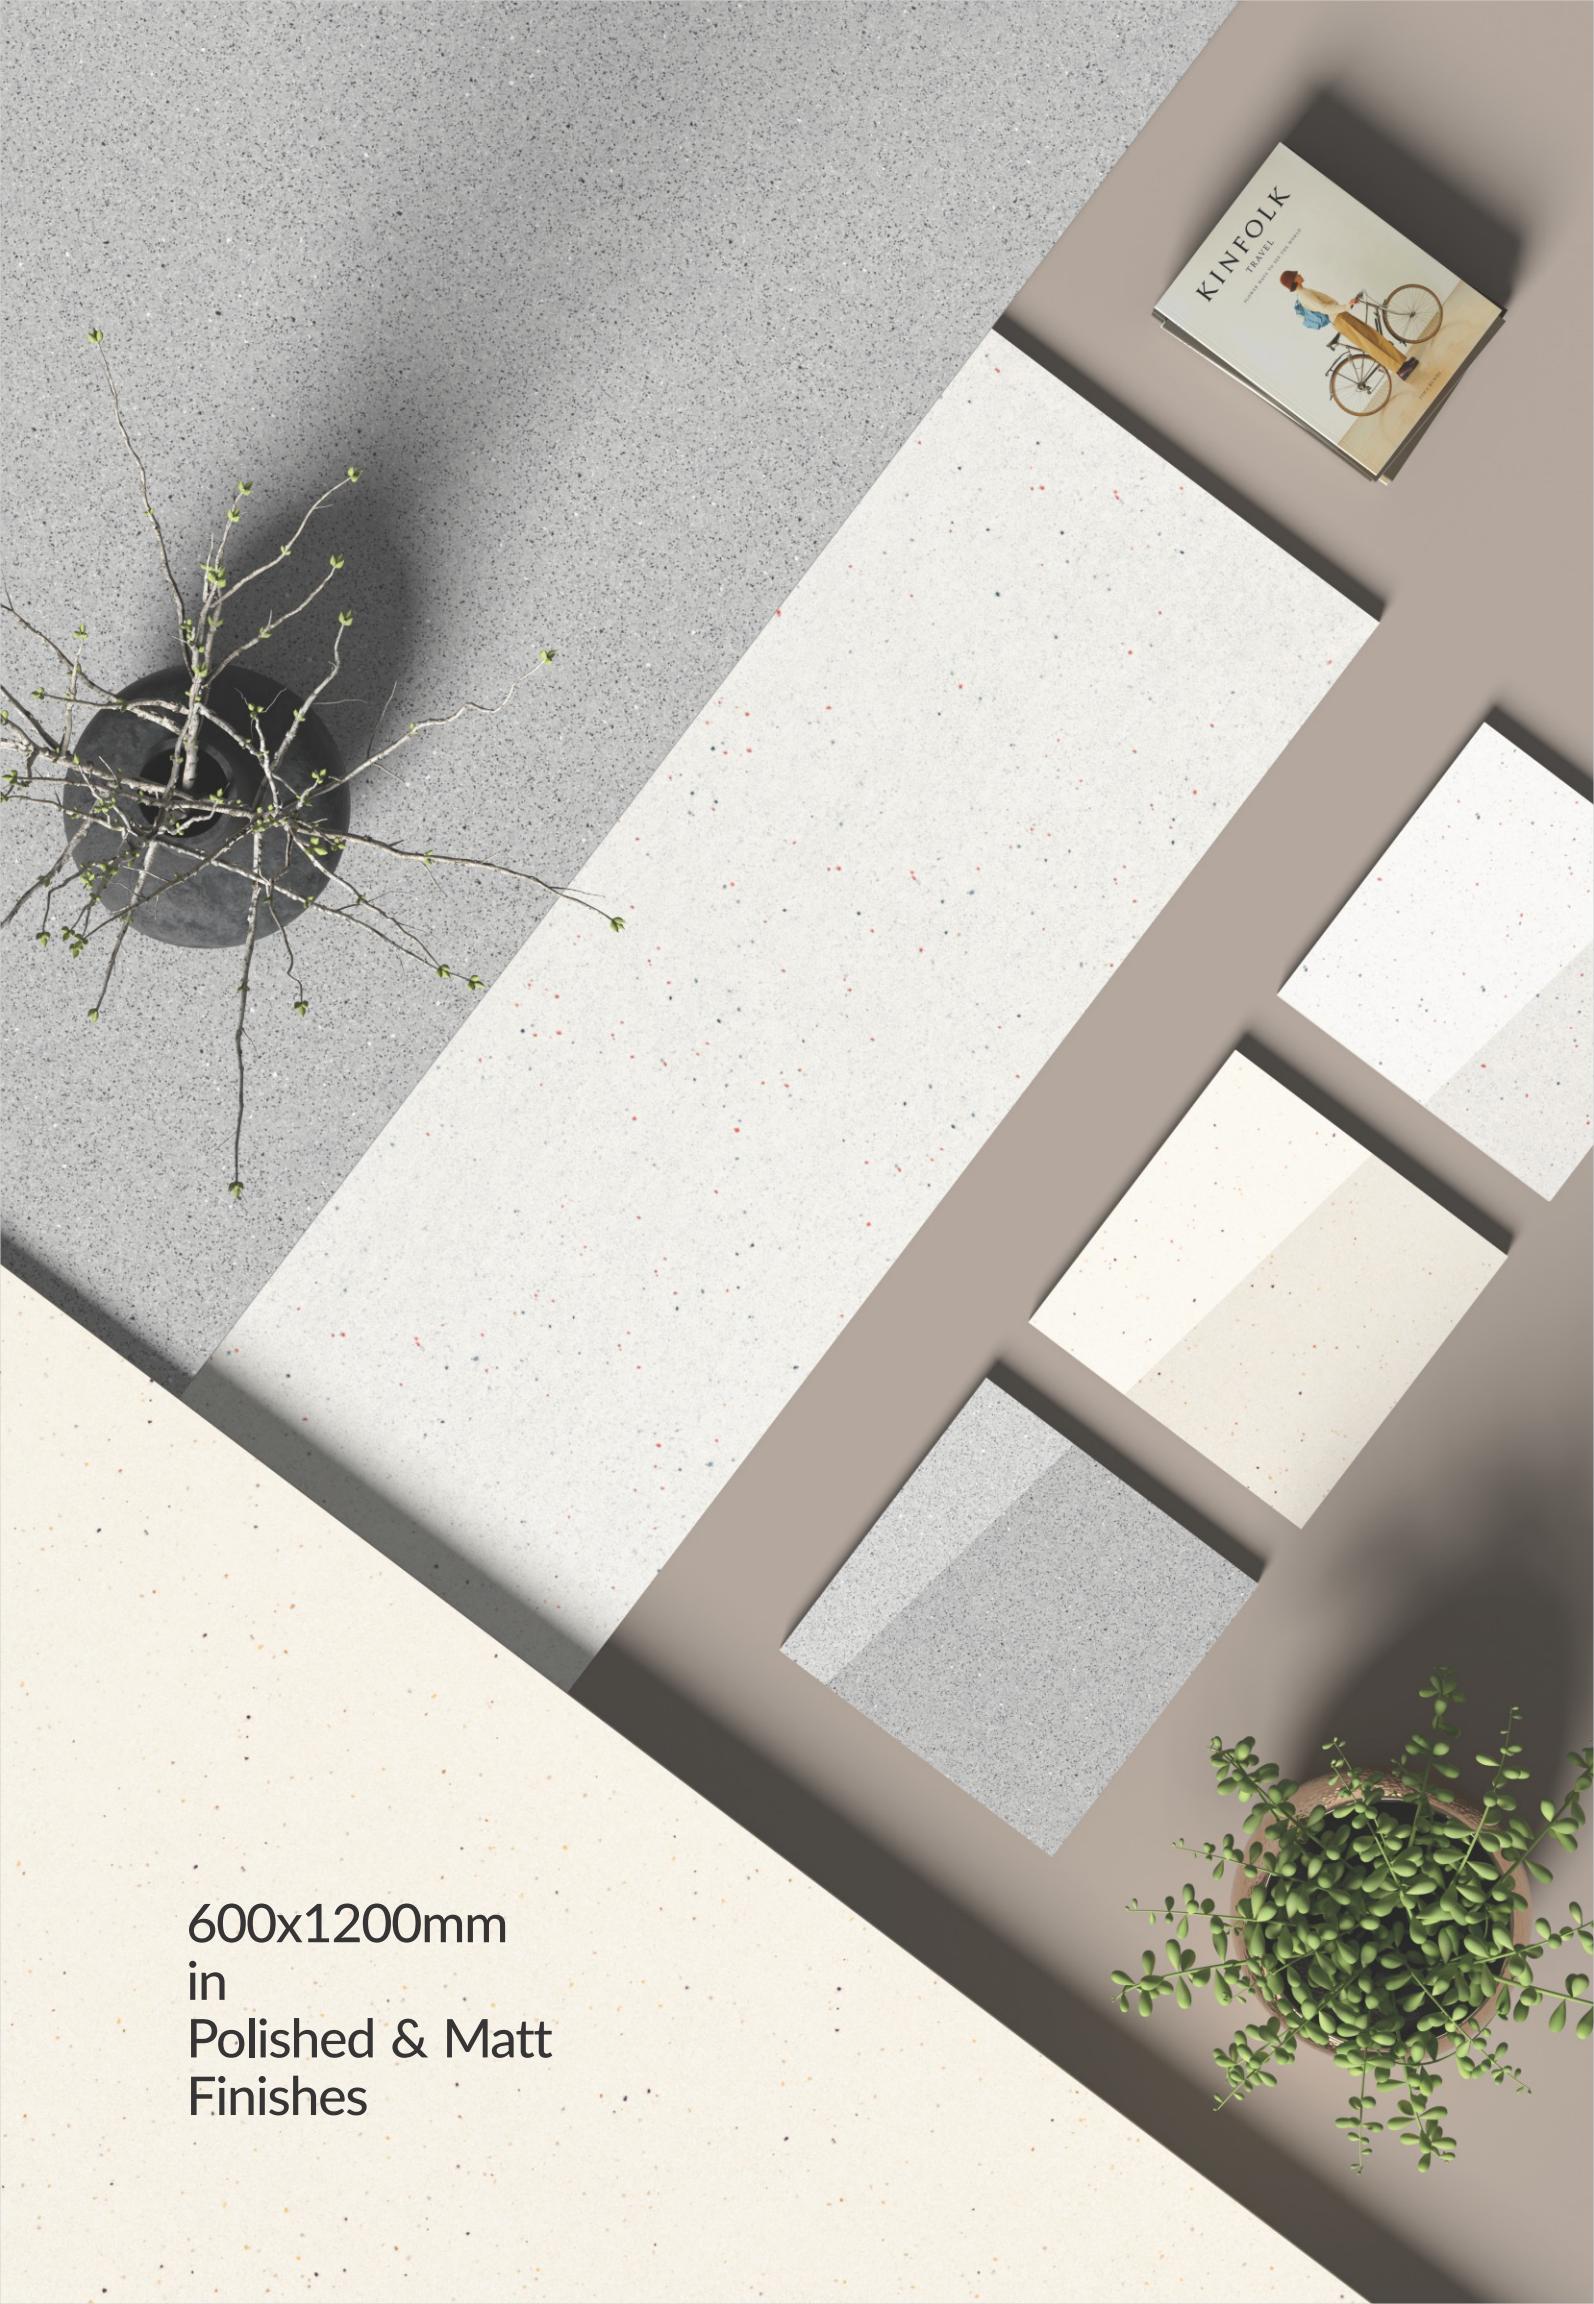

600x1200mm
in
Polished & Matt
Finishes

FULLBODY VITRIFIED TILES

With 9mm thickness and an array of finishes including Matt & Polished, these surfaces from the Metosis Collection are apt for spaces that demand superior strength without compromising on style. These fullbody vitrified tiles with their grit-centric intricacy, style your space in an inspiring manner.





9mm Thickness

FEATURES THAT ARE POWERED BY EXCELLENCE

It's no surprise that these fullbody vitrified tiles make a power move in terms of strength & durability. But what makes them apart is their dynamic application possibilities.

Their ability to remain non-porous, stain-resistant, and scratch-resistant makes them an ideal choice for both residential and commercial spaces. Experience the seamless utility of these 600x1200mm pieces that promise to add a new touch to your space.

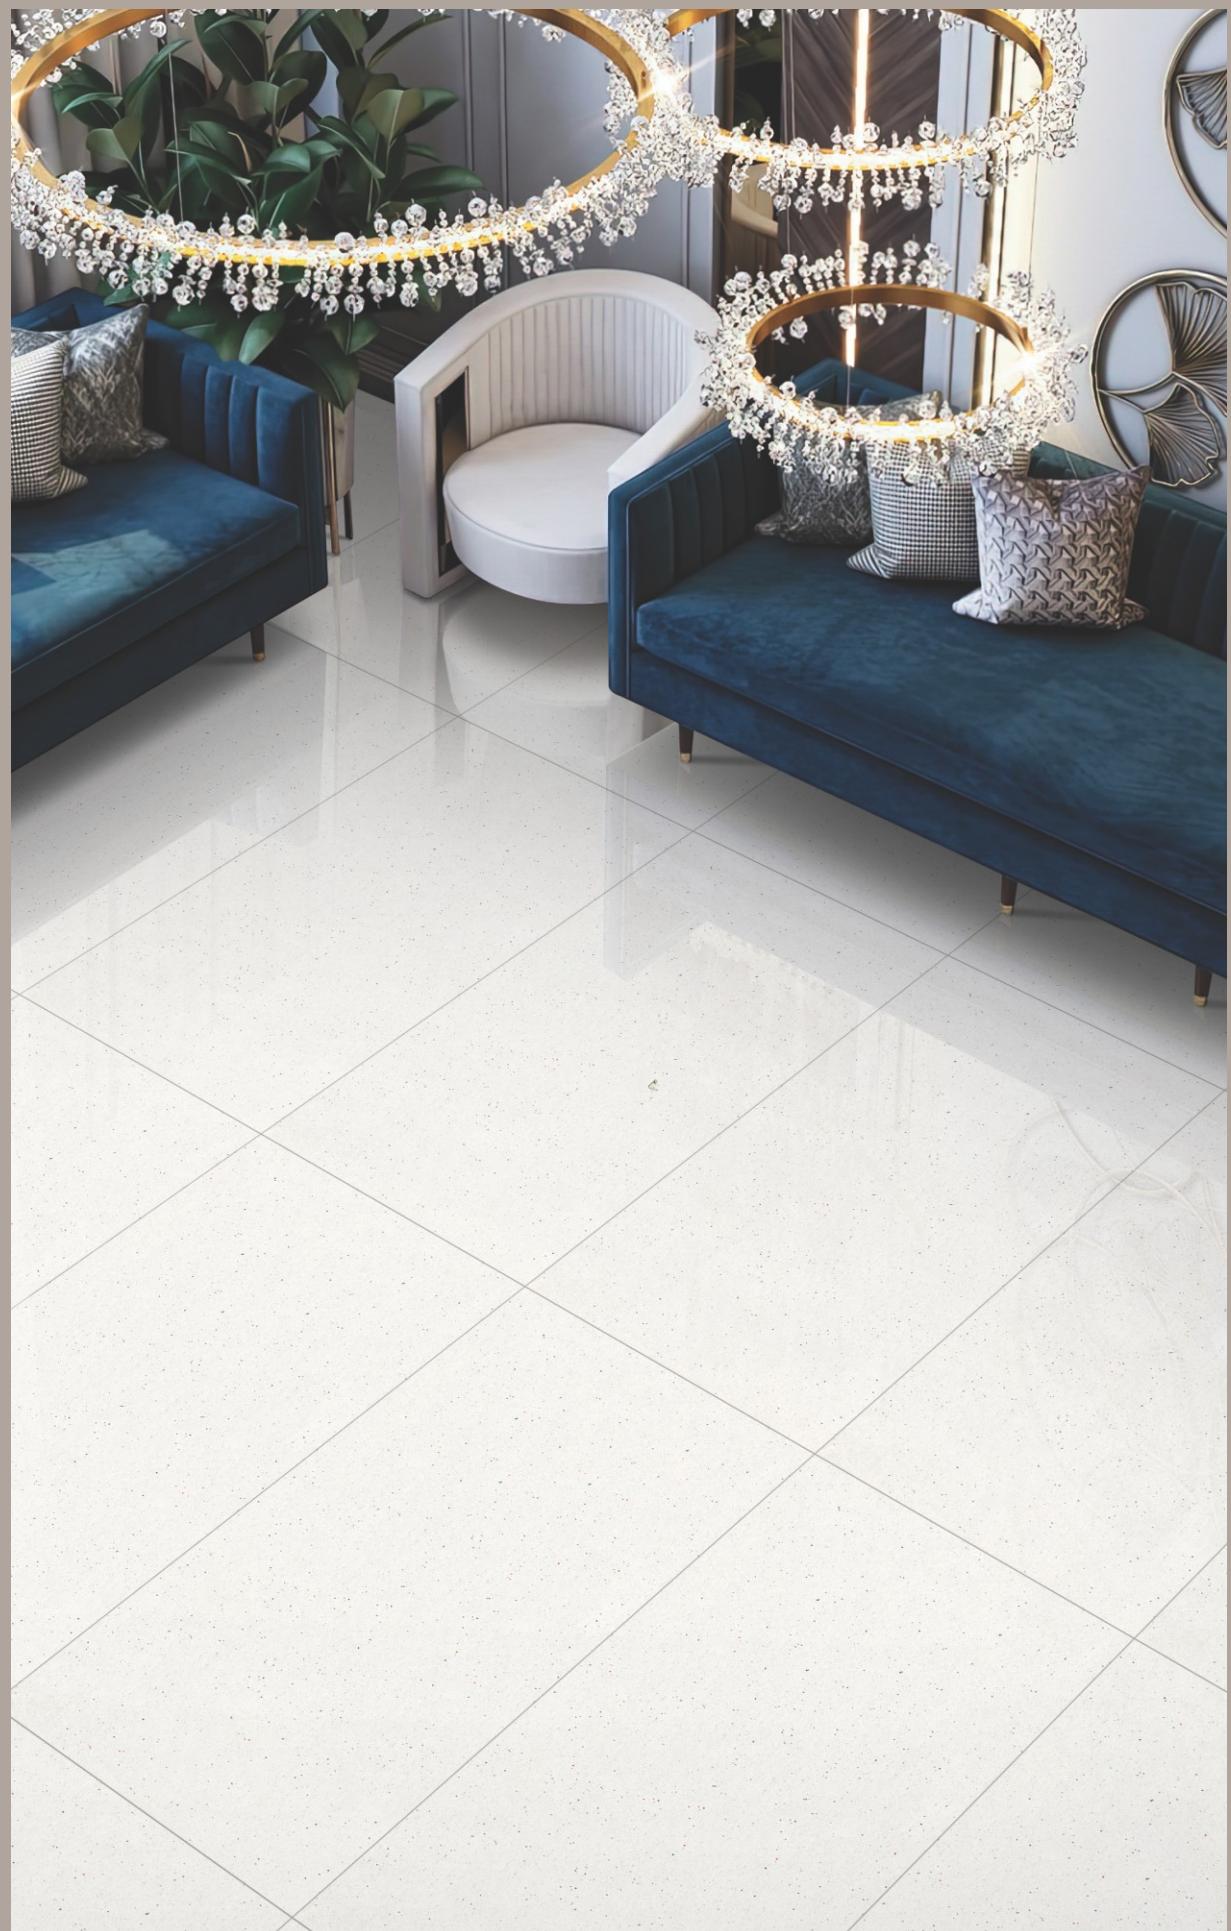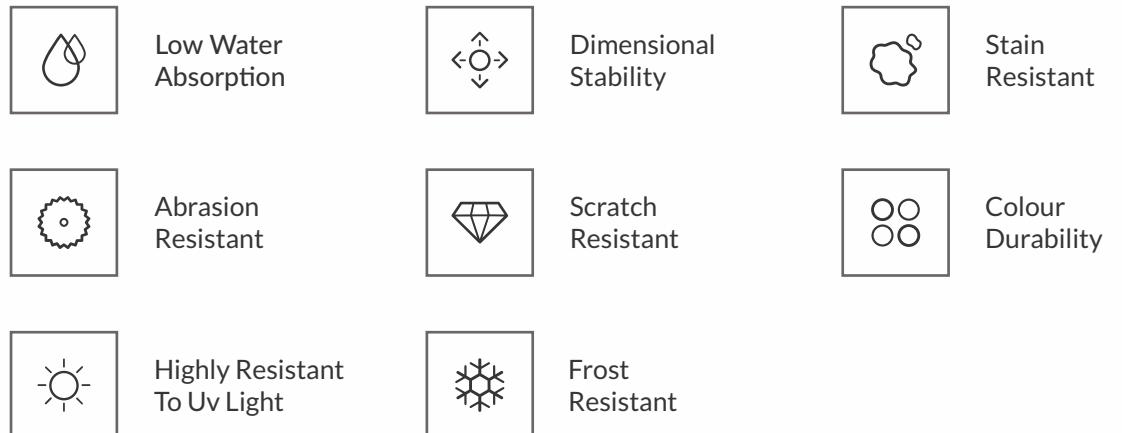

METOSIS BIANCO

Size:
600x1200mm

Finish:
Polished

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





METOSIS GREY

Size:
600x1200mm

Finish:
Polished

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





METOSIS WHITE

Size:
600x1200mm

Finish:
Polished

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





METOSIS BIANCO

Size:
600x1200mm

Finish:
Matt

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





METOSIS GREY

Size:
600x1200mm

Finish:
Matt

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





METOSIS WHITE

Size:
600x1200mm

Finish:
Matt

Thickness:
9mm

Type:
Fullbody Vitrified Tiles





Technical Specifications

TECHNICAL DETAILS	STANDARD AS PER ISO-13006 / EN176 GROUP BLA	MEAN VALUE OF OUR FULLBODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Water Absorption	= 0.50%	≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Mohs Hardness	Min. 6	= 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Household Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (Friction Co-Efficient)	> 0.40	> 0.40	ISO-10545-17

Disclaimer:

Our reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at any time. The colors of tiles shown in this catalogue are purely illustrative to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

Packing Details

SIZES	PCS. / BOX	WEIGHT / BOX (Approx.)	COVERAGE AREA / BOX
600x1200mm	2 pcs.	28.5 kg - Matt 27 kg - Polished	15.50 ft ² or 1.44 mtr ²

